

CHERRY MX SILENT RGB BLACK



Models may vary from the image shown

Silent CHERRY MX-RGB keyswitch with patented (patent pending) noise reduction

Uncompromising. CHERRY MX SILENT RGB keyswitch. The CHERRY original in its quietest and most illuminant form. Patented (patent pending) noise reduction combined with 16.7 million colours and worldwide unique Gold Crosspoint technology.

Key benefits

- RGB black switch: Without pressure point, linear actuation - easy switching function with a defined force of approx. 60 cN without contact feedback
- Noise optimised MX-RGB keyswitch version optimised for use with SMD LEDs (RGB or single colour)
- The only solution from a single source: patented (patent pending) noise reduction with integrated 2-component stem and worldwide unique Gold Crosspoint contact technology
- Minimises bottom-out and top out noise.
- Even illumination with optimised, transparent casing and scattering surface including lens.
- Option to use all 16.7 million RGB colours in high luminosity (scope of supply does not include LED)
- SMD LEDs directly mounted on the circuit board for cost-efficient, fully automated production
- Noise reduction takes place in the glass-fibre reinforced base, regardless of 3rd party solutions on the keyswitch.
- Precision "Made in Germany" with a short bounce time of < 5 ms
- Self-cleaning contacts, resistant to dust and dirt
- Over 50 million strokes per keyswitch without compromising

on quality.

- Long-lasting safe switching performance in the renowned "Original CHERRY quality" tried-and-tested a billion times over.


Technical Data:

Housing colour:

Transparent cover, plain base

Keymodule:

- Switch type: MX
- Protection class: IP40
- Operation characteristics: BLACK SWITCH SILENT Linear (60 cN)

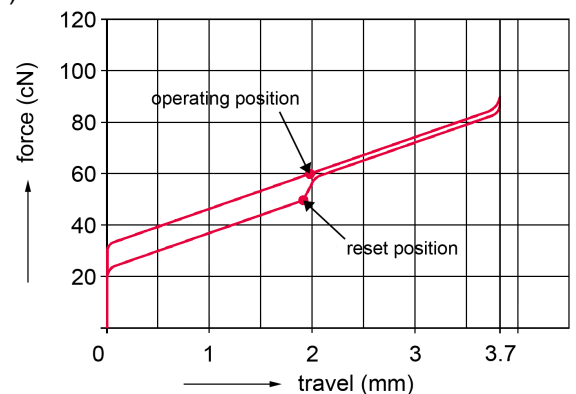

- Fastening: Product dependant, see table "Models"
- Switching voltage: 12 V AC/DC max.
- Switching current: 10 mA AC/DC max.
- Dielectric strength: 500 V / 50Hz
- Durability: > 50 million actuations
- Contact configuration: Single-pole contact
- Actuator travel: 3.7 -0.4 mm
- Pretravel: 1.9 ± 0.6 mm
- Initial force: 30 cN min.
- Actuation force: 60 ± 20 cN
- Bounce time: < 5 ms (during actuation with 0,4 m/s)
- Standard lead spacing: 19.05 mm (16 mm min.)
- Lighting: SMD LED can be mounted directly on the circuit board (not included in the module), opening for SMD LED in the base.
- Decoupling diode: no
- Wire jumper: no
- Insulation materials: Thermoplastics (min.UL 94 HB)
- Spring: Stainless steel
- Contacts: High-quality gold alloy
- Storage Temperature: -40°C to 70°C
- Operating Temperature: -10°C to 70°C
- Humidity: Storage: average <50% max. 3 months / 75% max. 15 days, operation: 5% to 95% without condensation

For detailed information and the layout of the details described above, please do not hesitate to ask for our technical specifications and drawing.

Warranty:

2 years

Errors, technical changes and delivery possibilities excepted.
Technical information refers only to the specifications of the
products. Features may differ from the information provided.

Models:

	Product name	Order number	Fastening
1	CHERRY MX SILENT RGB BLACK	MX3A-11NA	Snap fastening in frame
2	CHERRY MX SILENT RGB BLACK	MX3A-11NB	Fixing pins in the printed circuit board

CHERRY MX SILENT BLACK



Models may vary from the image shown

Silent CHERRY MX keyswitch with patented (patent pending) noise reduction

Silent CHERRY MX keyswitch - the original with no compromises. The patented (patent pending) noise reduction reliably minimises any operating noises. This is the most silent form of quality, precision and reliability.


Key benefits

- Black switch: Without pressure point, linear actuation - switching function with a defined force of approx. 60 cN without contact feedback
- Noise-optimised MX keyswitch version with the worldwide unique Gold Crosspoint contact technology.
- The only solution from a single source: patented (patent pending) noise reduction with integrated 2-component stem.
- Reliable reduction of bottom-out and top out noise
- Noise reduction takes place in the glass-fibre reinforced base, regardless of 3rd party solutions on the keyswitch.
- Precision "Made in Germany" with a short bounce time of < 5 ms
- Self-cleaning contacts, resistant to dust and dirt
- Over 50 million strokes per keyswitch without compromising on quality.
- Long-lasting safe switching performance in the renowned "Original CHERRY quality" tried-and-tested a billion times over.

Technical Data:

Keymodule:

- Switch type: MX
- Protection class: IP40
- Operation characteristics: BLACK SWITCH SILENT Linear (60 cN)

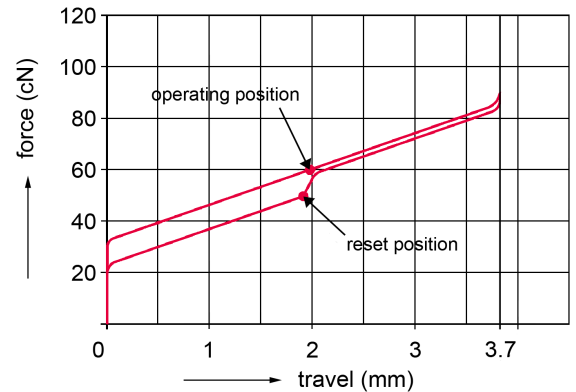

- Fastening: Product dependant, see table "Models"
- Switching voltage: 12 V AC/DC max.
- Switching current: 10 mA AC/DC max.
- Dielectric strength: 500 V / 50Hz
- Durability: > 50 million actuations
- Contact configuration: Single-pole contact
- Actuator travel: 3.7 -0.4 mm
- Pretravel: 1.9 ± 0.6 mm
- Initial force: 30 cN min.
- Actuation force: 60 ± 20 cN
- Bounce time: < 5 ms (during actuation with 0,4 m/s)
- Standard lead spacing: 19.05 mm (16 mm min.)
- Lighting: Product dependant, see table "Models"
- Decoupling diode: Product dependant, see table "Models"
- Wire jumper: Product dependant, see table "Models"
- Insulation materials: Thermoplastics (min.UL 94 HB)
- Spring: Stainless steel
- Contacts: High-quality gold alloy
- Storage Temperature: -40°C to 70°C
- Operating Temperature: -10°C to 70°C
- Humidity: Storage: average <50% max. 3 months / 75% max. 15 days, operation: 5% to 95% without condensation

For detailed information and the layout of the details described above, please do not hesitate to ask for our technical specifications and drawing.

Warranty:

2 years

Errors, technical changes and delivery possibilities excepted. Technical information refers only to the specifications of the products. Features may differ from the information provided.

Models:

	Product name	Order number	Fastening	Lighting	Decoupling diode	Wire jumper
1	CHERRY MX SILENT BLACK	MX3A-11DN	Snap fastening in frame	no	yes	no
2	CHERRY MX SILENT BLACK	MX3A-11DW	Fixing pins in the printed circuit board	no	yes	no
3	CHERRY MX SILENT BLACK	MX3A-11GN	Snap fastening in frame	LED in green	no	no
4	CHERRY MX SILENT BLACK	MX3A-11GW	Fixing pins in the printed circuit board	LED in green	no	no
5	CHERRY MX SILENT BLACK	MX3A-11JN	Snap fastening in frame	no	no	yes
6	CHERRY MX SILENT BLACK	MX3A-11JW	Fixing pins in the printed circuit board	no	no	yes
7	CHERRY MX SILENT BLACK	MX3A-11NN	Snap fastening in frame	no	no	no
8	CHERRY MX SILENT BLACK	MX3A-11NW	Fixing pins in the printed circuit board	no	no	no
9	CHERRY MX SILENT BLACK	MX3A-11RN	Snap fastening in frame	LED in red	no	no
10	CHERRY MX SILENT BLACK	MX3A-11RW	Fixing pins in the printed circuit board	LED in red	no	no
11	CHERRY MX SILENT BLACK	MX3A-11YN	Snap fastening in frame	LED in yellow	no	no
12	CHERRY MX SILENT BLACK	MX3A-11YW	Fixing pins in the printed circuit board	LED in yellow	no	no